



GCE MARKING SCHEME

SUMMER 2017

MATHEMATICS - M2
0981-01

INTRODUCTION

This marking scheme was used by WJEC for the 2017 examination. It was finalised after detailed discussion at examiners' conferences by all the examiners involved in the assessment. The conference was held shortly after the paper was taken so that reference could be made to the full range of candidates' responses, with photocopied scripts forming the basis of discussion. The aim of the conference was to ensure that the marking scheme was interpreted and applied in the same way by all examiners.

It is hoped that this information will be of assistance to centres but it is recognised at the same time that, without the benefit of participation in the examiners' conference, teachers may have different views on certain matters of detail or interpretation.

WJEC regrets that it cannot enter into any discussion or correspondence about this marking scheme.

Mathematics M2 (June 2017)

Markscheme

Q	Solution	Mark	Notes
1(a)(i)	$\mathbf{v} = \frac{d}{dt} \mathbf{r}$	M1	differentiation attempted
	$\mathbf{v} = (\sin t + t \cos t)\mathbf{i} + (\cos t - t \sin t)\mathbf{j}$	A1	Vector required
	$(\text{mod } \mathbf{v})^2 = (\sin t + t \cos t)^2 + (\cos t - t \sin t)^2$	M1	
	$= \sin^2 t + 2t \sin t \cos t + t^2 \cos^2 t$	A1	Ft similar expressions
	$+ \cos^2 t - 2t \sin t \cos t + t^2 \sin^2 t$		
	$= 1 + t^2$		
	$\text{Speed of } P = \sqrt{1+t^2}$	A1	cao
1(a)(ii)	<p>Momentum vector = $m\mathbf{v}$</p> $= 3[(\sin t + t \cos t)\mathbf{i} + (\cos t - t \sin t)\mathbf{j}]$ $= 3(\sin t + t \cos t)\mathbf{i} + 3(\cos t - t \sin t)\mathbf{j}$	B1	ft $\mathbf{v}(c)$
1(b)	<p>At $t = \frac{\pi}{6}$,</p> $\mathbf{r} = \frac{\pi}{6} \sin \frac{\pi}{6} \mathbf{i} + \frac{\pi}{6} \cos \frac{\pi}{6} \mathbf{j}$ $\mathbf{r} = \frac{\pi}{12} \mathbf{i} + \frac{\pi\sqrt{3}}{12} \mathbf{j}$	B1	
	<p>If perpendicular, $\mathbf{r} \cdot (b \mathbf{i} + \sqrt{3} \mathbf{j}) = 0$</p>	M1	
	$\left(\frac{\pi}{12} \mathbf{i} + \frac{\pi\sqrt{3}}{12} \mathbf{j}\right) \cdot (b \mathbf{i} + \sqrt{3} \mathbf{j})$ $= \frac{\pi}{12} b + \frac{\pi\sqrt{3}}{12} \times \sqrt{3}$	M1A1	method correct, no \mathbf{i}, \mathbf{j}
	$\frac{\pi}{12} b + \frac{3\pi}{12} = 0$ $b + 3 = 0$ $b = \underline{-3}$	A1	cao

Q	Solution	Mark	Notes
2(a)	$x = \int 4t^3 - 6t + 7 \, dt$ $x = t^4 - 3t^2 + 7t + (C)$ <p>When $t = 0, x = 5$ $C = 5$ $x = t^4 - 3t^2 + 7t + 5$</p> <p>When $t = 2$ $x = 2^4 - 3 \times 2^2 + 7 \times 2 + 5$ $x = 16 - 12 + 14 + 5$ $x = \underline{23 \text{ (m)}}$</p>	M1 A1 m1 m1 A1	at least one power increased. correct integration initial conditions used used cao
2(b)	$a = \frac{dv}{dt}$ $a = 12t^2 - 6$ $F = ma = 0.8(12t^2 - 6)$ <p>When $t = 3$ $F = 0.8(12 \times 3^2 - 6)$ $F = \underline{81.6 \text{ (N)}}$</p>	M1 A1 M1 A1	at least one power decreased. Ft a cao


Q	Solution	Mark	Notes
3(a).	$T = \frac{P}{v}$ $T = \frac{12000}{3} = (4000)$	B1	
	N2L	M1	dimensionally correct 4 terms, allow sin/cos
	$T - mg \sin \alpha - R = ma$ $4000 - 3000 \times 9.8 \times 0.1 - 460 = 3000a$ $a = \underline{0.2 \text{ (ms}^{-2}\text{)}}$	A1 A1	cao
3(b)	N2L	M1	dimensionally correct 4 terms, allow sin/cos
	$a = 0$ $T - 10v - mg \sin \alpha - R = 0$ $\frac{12000}{v} - 10v - 3000 \times 9.8 \times 0.1 - 460 = 0$ $\frac{12000}{v} - 10v - 3400 = 0$ $12000 - 10v^2 - 3400v = 0$ $v^2 + 340v - 1200 = 0$ $v = \frac{-340 \pm \sqrt{340^2 + 4 \times 1200}}{2}$ $v = \underline{3.49}$	M1 A1	dep on both M cao answer rounding to 3.5.

Q	Solution	Mark	Notes
4(a)	initial vertical vel of $P = 15\sin 60^\circ$ $= \frac{15\sqrt{3}}{2} = 12.99$ initial vertical vel of $Q = v\sin 30^\circ$	B1	either correct expression
	use of $s = ut + 0.5gt^2$	M1	
	height of P at time $t = \frac{15\sqrt{3}}{2}t - 0.5gt^2$		
	height of Q at time $t = 0.5vt - 0.5gt^2$	A1	either
	For collision		
	$\frac{15\sqrt{3}}{2}t - 0.5gt^2 = 0.5vt - 0.5gt^2$	m1	
	$v = 15\sqrt{3} = 25.98$	A1	accept 26
4(b)	initial horiz vel of $P = 15\cos 60^\circ$ $= 7.5$ initial horiz vel of $Q = 15\sqrt{3}\cos 30^\circ$ $= 22.5$	B1	either
	For collision,		
	$7.5t + 22.5t = 18$	M1	
	$t = 0.6$ (s)	A1	convincing
4(c)	use of $v = u + at$, $u = \frac{15\sqrt{3}}{2}$ (c), $a = \pm 9.8$, $t = 0.6$	M1	
	$v = \frac{15\sqrt{3}}{2} - 9.8 \times 0.6$	A1	Ft u
	$v = 7.1$		
	speed = $\sqrt{7.1^2 + 7.5^2}$ $= \underline{10.3(\text{ms}^{-1})}$	M1 A1	accept candidate's values cao

Q
5

Solution

Mark Notes

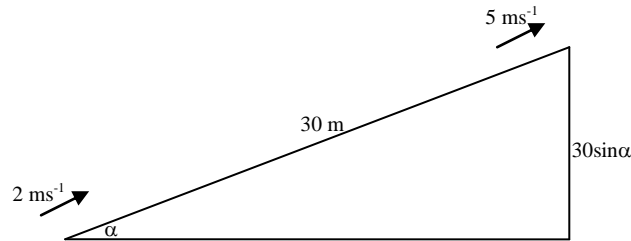

$$\text{KE at } t=0 = 0.5 \times 4000 \times 2^2$$

$$\text{KE at } t=0 = 8000 \text{ (J)}$$

$$\text{PE at } t=0 = 0$$

M1A1 $v=2$ or 5

$$\text{KE at } t=8 = 0.5 \times 4000 \times 5^2$$

$$\text{KE at } t=8 = 50000 \text{ (J)}$$

$$\text{PE at } t=8 = 4000 \times 9.8 \times h$$

M1

$$\text{PE at } t=8 = 4000 \times 9.8 \times 30 \sin \alpha$$

A1

$$\text{PE at } t=8 = 58800 \text{ (J)}$$

$$\text{WD by engine} = 43000 \times 8$$

B1

$$\text{WD by engine} = 344000 \text{ (J)}$$

Work-energy principle

M1

KE, PE and WD(2 terms)

$$8000 + 344000 = \text{WD} + 50000 + 58800$$

A1


correct equation

$$\text{WD} = \underline{243200 \text{ (J)}}$$

A1

cao

6



6(a)	conservation of energy	M1	KE and PE in equation
	$0.5mu^2 - mgl\cos 60^\circ = 0.5mv^2 - mgl\cos\theta$	A1A1	
	$v^2 = u^2 - 0.8g + 1.6g\cos\theta$	A1	cao
	$v^2 = u^2 - 7.84 + 15.68\cos\theta$		

6(b)	N2L towards centre	M1	dim correct equation T and $5g\cos\theta$ opposing
------	--------------------	----	---

$$T - 5g\cos\theta = \frac{5v^2}{0.8}$$

A1

$$T = 5g\cos\theta + \frac{5}{0.8}(u^2 - 0.8g + 1.6g\cos\theta)$$

m1 subt v^2 equivalent

$$T = 6.25u^2 - 5g + 15g\cos\theta$$

A1 expressions
cao, any correct expression


$$T = 6.25u^2 - 49 + 147\cos\theta$$

6(c)	For complete circles, $T \geq 0$ when $\theta = 180^\circ$, ($\cos\theta = -1$).	M1	
	$6.25u^2 \geq 49 + 147$		
	$u^2 \geq 31.36$		
	$u \geq 5.6$	A1	cao

6(d)	For complete circles, $v^2 \geq 0$ when $\theta = 180^\circ$, ($\cos\theta = -1$).	M1	
	$u^2 \geq 7.84 + 15.68$		
	$u^2 \geq 23.52$		
	$u \geq 4.85$	A1	cao

Q Solution Mark Notes

7.



7(a) Resolve vertically
 $T \cos \theta = 2g$

M1
 A1 allow m

N2L towards centre of motion
 $T \sin \theta = 2r\omega^2$
 $T \sin \theta = 2l \sin \theta \omega^2$
 $T = 2l\omega^2$

M1
 A1
 A1 use of $r=l \sin \theta$

$$2l \omega^2 \cos \theta = 2g$$

$$\cos \theta = \frac{g}{l\omega^2}$$

A1 convincing

7(b)(i) $T \cos \theta = 2g, T = 20g$
 $\cos \theta = \underline{0.1}$

B1

7(b)(ii) $\cos \theta = 0.1$ and $\omega^2 = 3g, \cos \theta = \frac{g}{l\omega^2}$

$$0.1 = \frac{g}{l \times 3g}$$

M1 or $20g = 2l \times 3g$

$$l = \frac{10}{3}$$

A1 convincing

7(b)(iii) Hooke's Law

$$T = \frac{\lambda x}{\text{natural length}}$$

M1 used,
 condone natural length = 10/3, but x not 10/3 or 3

$$20g = \frac{\lambda(\frac{10}{3} - 3)}{3}$$

A1 one of 10/3-3 or 3 correct

$$\lambda = \underline{180g} = \underline{1764}$$

A1 cao

$$7(b)(iv)EE = \frac{\lambda x^2}{2(nat\ len)}$$

M1 used

$$EE = \frac{1764}{2 \times 3 \times 3^2}$$

$$EE = \frac{98}{3} = \underline{\underline{32.67\ (J)}}$$

A1 cao